

ENG

Conik® Roll

Design and aesthetics
for the registration of users

- Fingerprint capturing device.
- Used for the registration and identification of users.
- Connection through USB cable.
- Elegant and ergonomic design.



MAIN CHARACTERISTICS

- Attractive design available in different colours. Possibility of personalising the finish.
- Energy supply comes from the data USB.
- High speed and quality recording of the biometric pattern.
- Authentication times (1:1): less than 1 second (standard time).
- Identification Times (1:500 people): 1.5 seconds.

TECHNICAL FEATURES

Biometric features

- Optical sensor
- Area of the sensor: 18 x 22 mm.
- Resolution: 500dpi.
- Authentication times (1:1): less than 1 second (standard time).
- Identification Times (1:500 people): 1.5 seconds.
- FAR <= 0.00001%.

Environmental characteristics

- Operating temperature: -10°C to 45°C.
- Storage temperature: -20°C to 70°C.
- Relative humidity: 20% to 80%.

Autonomy

- Necessary power supply: USB.


Network and communications

- USB communication connected to PC.


Installation

- Desktop.

Topology

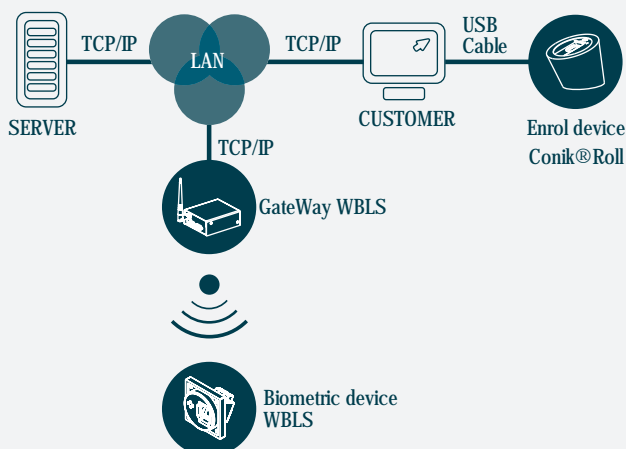

Planimetry

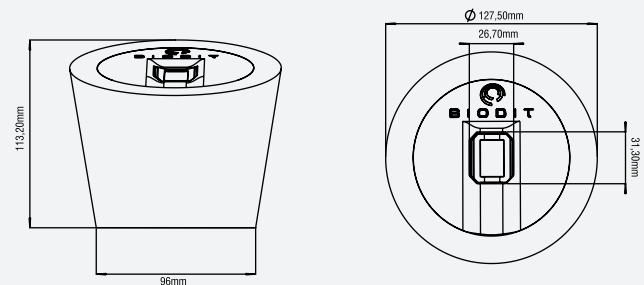

Dealer:

Certification **CE**:
 EN 300 328 (v.1.7.19) en 301 489 - 17 (v.1.2.1)
 EN 60950-1 (2006)

Parque Tecnológico
 Gustave Eiffel, 3
 46980 Paterna
 [Valencia] Spain
 T_+34 902 544 888
 www.biodit.com